



UNI-GRIP MOBILE VIBRATION SOLUTION

UGS - NEW UNI-GRIP MOBILE SYSTEM

UGS To suit Pneumatic Vibrators

APPLICATION	Formworks, Concrete Placement, Precast Moulds
SAFETY CABLE	Included


SUITABLE FOR

Steel and Timber Formwork, Concrete Placement and Concrete Precast Projects

Universal fit to major Formwork Brands.

DOKA, GHI, MEVA, PERI, RMD, ULMA, WACO

Tunnel Formwork, Wall Formwork, Column Formwork, Slab Formwork, Bridge Formwork, Specialised Projects,

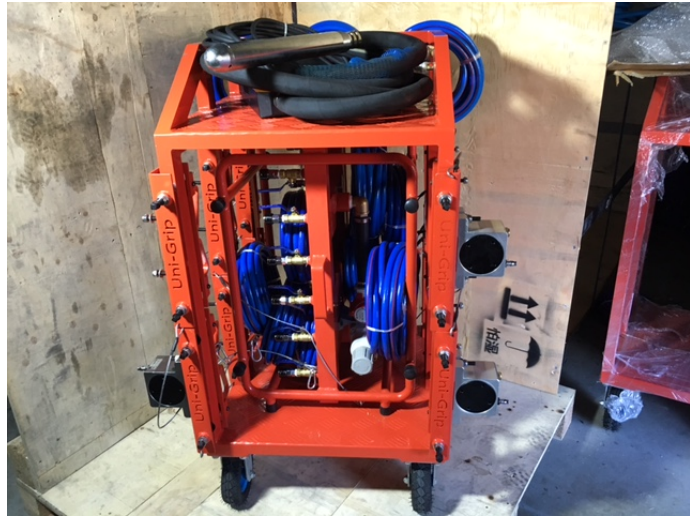

UGS CONTENTS

Model	UGB (Qty)	UGV (Qty)	UGM (Qty)	UGT (Qty)	UGA (Qty)	UGSP (Qty)	UGFP (Qty)
UGS001	12	12	1	1	12	1	1

- UGB QUICK RELEASE BRACKET
- UGV OLI OT36 PNEUMATIC VIBRATOR
- UGM MANIFOLD - 12 PORT
- UGT TROLLEY - SAFE STORAGE AND TRANSPORT
- UGA AIR HOSE 10mm X 10M LENGTHS
- UGSP SPARES PACK - FOR BRACKET
- UGFP FLEXIBLE INTERNAL POKER

THE BEST THING WE DO IS SAVE YOU TIME

- NEW QUICK RELEASE SYSTEM
- MOBILE
- LIGHTWEIGHT
- QUICK TO RELOCATE
- SIMPLE DESIGN
- EASY TO OPERATE
- ENERGY EFFICIENT

A TOTAL SOLUTION

For your Formwork, Concrete Placement or Precast Projects:

CALL NOW ON : 0435203372

E mail: sales@uni-grip.com.au





UNI-GRIP QUICK RELEASE BRACKET

UGB - NEW Quick Release Bracket

UGB To suit Pneumatic Vibrators

APPLICATION	Formworks, Concrete Placement, Precast Moulds
SAFETY CABLE	Included

SUITABLE FOR

Steel and Timber Formwork, Concrete Placement and Concrete Precast Projects

Universal fit to major Formwork Brands.

DOKA, GHI, MEVA, PERI, RMD,ULMA, WACO

Tunnel Formwork, Wall Formwork, Column Formwork,Slab Formwork, Bridge Formwork, Specialised Projects,



UGB DIMENSIONAL SPECIFICATION

Model	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Suitable Beam widths (mm)			Foot print (mm)
UGB001	350	100	50	3.2	40-60	50-65	Steel	130
UGB002	350	90	50	2.8	40-50		Steel	130
UGBT1	350	100	50	3.2	50-80		Timber	130

UGV - OT36 Vibrator & Quick Release Bracket

UGV

APPLICATION	Formwork, Concrete placement, Precast moulds;
SAFETY CABLE	Included


SUITABLE FOR

Steel and Timber Formwork, Concrete Placement and Concrete Precast Projects

Universal fit to major Formwork Brands.

DOKA, GHI, MEVA, PERI, RMD,ULMA, WACO

Tunnel Formwork, Wall Formwork, Column Formwork,Slab Formwork, Bridge Formwork, Specialised Projects,

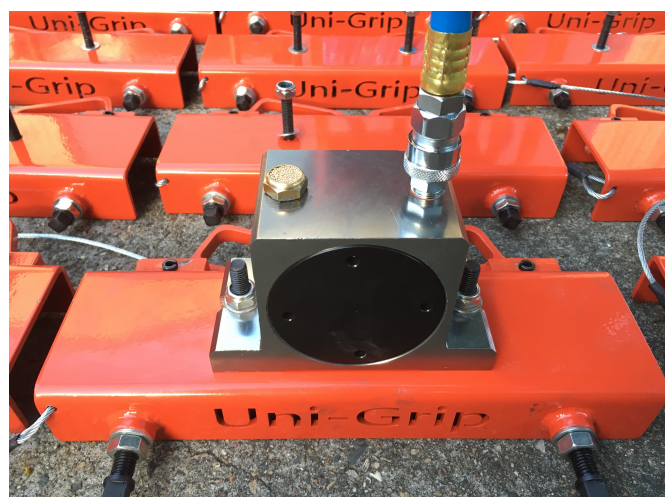

UGV DIMENSIONAL SPECIFICATIONS

Model	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Vibration Vpm	F C Max Kg	Air l/min
UGV001	160	73	100	2.3	8500-12000	341-749	749



UNI-GRIP PNEUMATIC MANIFOLD & TROLLEY



UGM - NEW Pneumatic Manifold

UGM 12 Port Pneumatic Manifold

APPLICATION Operate 12 Pneumatic OT36 Vibrators for your Formworks, Concrete Placement, Precast Moulds

SAFETY EXHAUST Included

SUITABLE FOR

Manual operation 1- 12 Pneumatic OT36 Vibrators.

Lightweight, Compact, Easy to Operate, Quick and Mobile.

Save time & increase your production for all your ;

Tunnel Formwork, Wall Formwork, Column Formwork, Slab Formwork, Bridge Formwork, Specialised Projects,



UGM DIMENSIONAL SPECIFICATION

Model	Length (mm)	Width (mm)	Height (mm)	Weight (kg)	Inlet Port (mm)	Outlet Ports (mm)
UGM001	700	475	500	17.2	25 Claw	10 Coupling



UGT - NEW Uni-Grip Trolley

UGT Uni-Grip Trolley

APPLICATION Store and Transport 12 x UGP Quick Release brackets

SAFETY 12 x OT36 External Pneumatic Vibrators

REAR BRAKES 12 x 10m Air lines
1 x Pneumatic Manifold
1 x Electric Internal Poker

SUITABLE FOR

Safe storage and transport of the UGP, UGM, OT36 Vibrators, Airlines & Internal Flexible Poker.

Lightweight, Compact, Easy to Operate, Quick and Mobile.

Save time & increase your production for all your ;

Tunnel Formwork, Wall Formwork, Column Formwork, Slab Formwork, Bridge Formwork, Specialised Projects,



UGM DIMENSIONAL SPECIFICATION

Model	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
UGT001	700	610	1160	28



UNI-GRIP INTERNAL POKERS

EWO - Internal Vibrator Flexible Poker

EWO Internal Vibrator

APPLICATION Formworks, Concrete
Placement, Precast Moulds

Internal Included
Frequency Converter

Key Features

- Ergonomic housing.
- Lightweight (3Kg).
- Tropicalised electronic board.
- IP 68 head protection class.
- Exclusive sealing system.
- Hardening treatment and chrome plating
- Equipped with 10 metres electric cable and 5 or 16 metres internal reinforced working hose.

BENEFITS

- Reliable.
- Safe.
- Easy to handle.
- No overheating.
- Easy maintenance.



CONVERTER

Input Voltage	230V +10% -15% 1ph
Input Frequency	50/60Hz ± 5%
Input Amperage	5.5 A



		EWO 38C	EWO 50C	EWO 59C	EWO 65C
Head Ø	[mm]	38	50	59	65
Head Length	[mm]	404	468	499	484
Head Weight	[kg]	2.4	5.4	8.2	9.4
Total Weight	[kg]	12.2	17.4	20.2	22.4
Centrifugal Force	[N]	1,700	3,760	5,640	7,330
Rated Current	[A]	1.5	2.7	3.0	4.5
Power	[kW]	0.5	0.9	1.0	1.4
Vibrator Needle Head Protection Class	IP 68				